

First Choice
Building Products

8860

SERIES



MORTISE LATCHING EXIT DEVICE

ANSI/BHMA GRADE 1 –
UL/ULC Listed for UL305
Panic Hardware


Suitable for Narrow,
Medium, and Wide
Stile Doors¹

Standard Door Widths
36", 42", 48"

¹ Minimum stile size of 2".

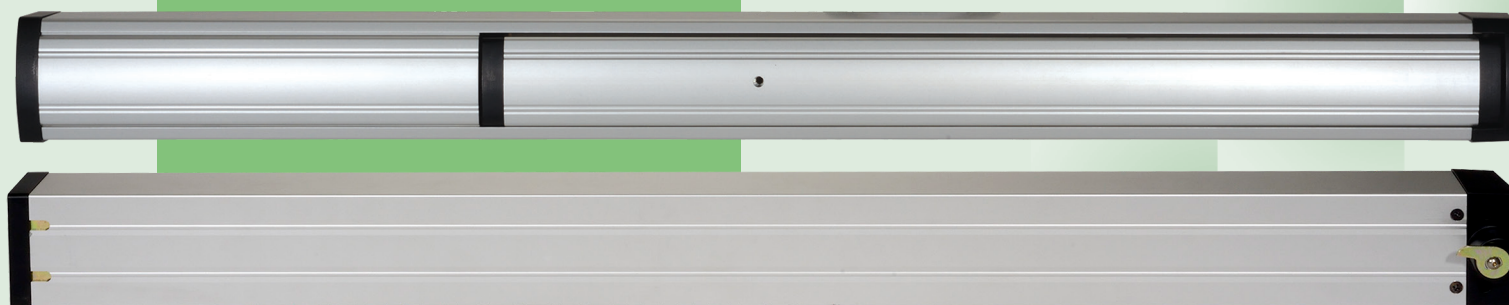
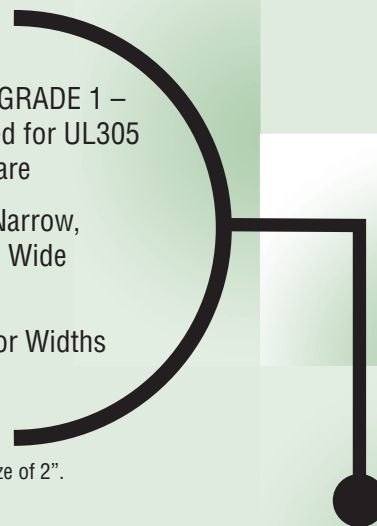


- Designed for simple prep and installation.
- Attractive low profile design with fully concealed fasteners.
- Extruded aluminum body in standard architectural colors.
- Device handing is field reversible.
- Hex key dogging standard.

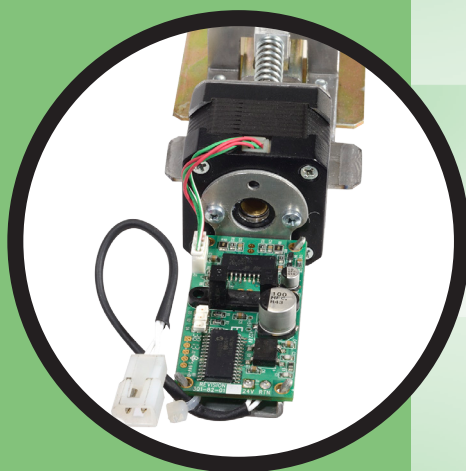

Options:

- **Electric Latch Retraction**
Motorized mechanism for fast, quiet operation capable of continuous duty.
- **Interior Key Cylinder Dogging**

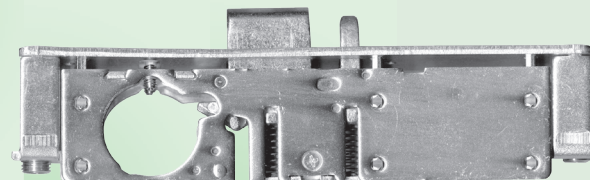

Includes heavy duty mortise,
deadlatching lockset

Lock Backsets available in
 $3\frac{1}{32}$ ", $1\frac{1}{8}$ ", $1\frac{1}{2}$ "

Device Height of $2\frac{1}{2}$ "

Device Projection of 3"

Standard Door Thickness $1\frac{3}{4}$ "

www.firstchoicebuildingproducts.com
Phone (800) 793-4544 • Fax (800) 867-5016



8860

S E R I E S

Available Finishes:

Clear Anodized (628)

Dark Bronze (313)

Black Anodized (335)

Door Sizes:

Door Thickness

1-3/4 or 2 inch

Door Widths

Up through 48 inches

Each device can be field trimmed
for doors as narrow as 30"

HOW TO ORDER

8860 | **AA** | **BB** | **CC** | **D** | **EE** | **FF**

AA - Door Widths

36 = 36 inches

42 = 42 inches

48 = 48 inches

BB - Accessory

ME = Electric Latch Retraction

CD = Inside Cylinder Dogging

CC - Door Finish

CL = Clear Anodized

BR = Dark Bronze

BL = Black Anodized

D - Factory Handing

R = Right Handed

L = Left Handed

EE - Backset

01 = 31/32"

02 = 1-1/8"

03 = 1-1/2"

FF - Strike Kit

S1 = Standard

S2 = Extended Lip